

B.L. WALLACE-DISTRIBUTOR, INC.


8542 La Salle St., Cypress, CA 90630 Phone (714)761-2071 FAX (714)761-0460
www.blwallace.com



SPECIFIED AND PREFERRED WORLDWIDE


L Series 1220-6X

Light Duty

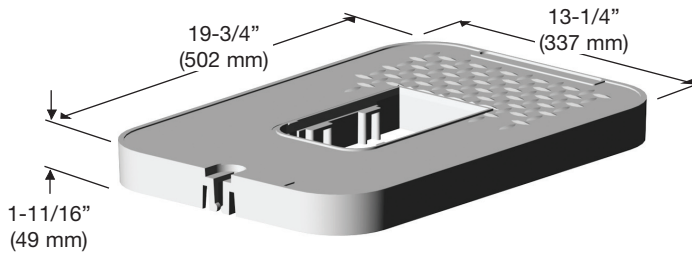


Flush Cover

Material: HDPE
Weight: 4.0 lbs.
Model: 1220-3 No Bolt
1220-3B Bolt Down

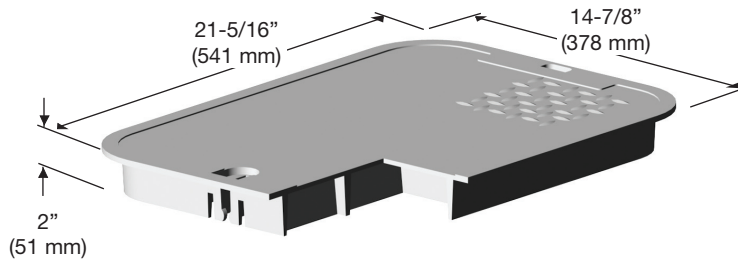

T-Cover

Material: HDPE
Weight: 4.0 lbs.
Model: 1220-4 No Bolt
1220-4B Bolt Down
See *OPTIONS SECTION*:
– Meter reader cover

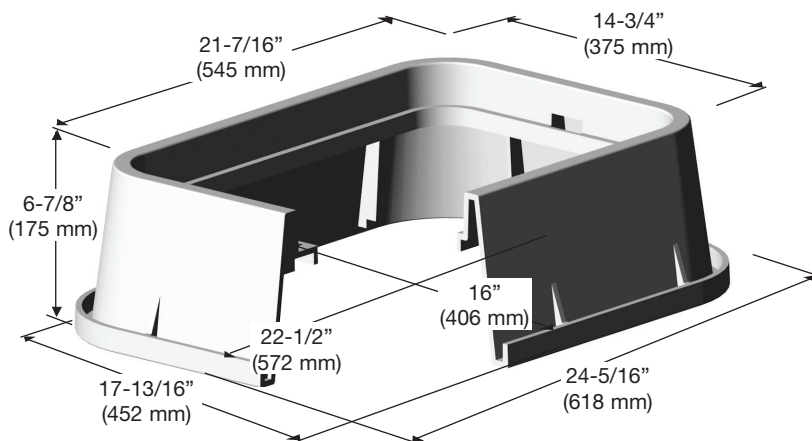

Extension Body

Material: HDPE
Weight: 6.0 lbs.
Model: 1220-6X

Colors Available

Green, Gray, Black, Tan or Violet

Note: For use in non-vehicular traffic situations only. We do not recommend installation in concrete or asphalt. Weights and dimensions may vary slightly.

L Series 1220-6X

Light Duty


Static Vertical Load Rating (Design Load; Test Load)

- ASTM C857 – A-0.3, 300 lbf/ft²; Report Ultimate
- SCTE – Light Duty, Pedestrian; 3,000 lbf

Shipping Configuration

- Unit, 28 assemblies, = 51.33 cu. ft., 330.0 lbs.
- Unit, 32 extensions only, = 210.0 lbs.

Note: For use in non-vehicular traffic situations only. We do not recommend installation in concrete or asphalt. Weights and dimensions may vary slightly.



B.L. WALLACE-DISTRIBUTOR, INC.

Cypress, CA

Phone: (714)761-2071


FAX: (714)761-0460

Website: www.blwallace.com

Material Property	ASTM Test Method	Typical Value ¹
Type, Class, Category	D 1248	III, A, 3
Density, g/cm ³	D 1505	0.950 min., not to exceed 0.965
Tensile Strength, at break, psi	D 638	3,000 to 4,400
Elongation, at break, %	D 638	400
Tensile Impact, ft-lb/in ²	D 1822	27
Flexural Modulus, psi	D 790	120,000 min., not to exceed 240,000
Low Temperature Brittleness, F50, at °C	D 746	<-76
Hardness, Shore D	D 2240	66
Deflection Temperature, at 66 psi, °F	D 648	150 ⁰ min., not to exceed 200 ⁰
Electrical Dielectric Strength, V/mil	D 149	400 min., not to exceed 600
Molded Product²		
Chemical Resistance	D 543	Very Resistant
Water Absorption	D 570	Less than 1% weight change

¹The values listed for physical property measurements are nominal values only. Certain physical property measurements are subject to variations consistent with the test methods and are within a generally accepted range for such values.
²Test reports available on request.

Shipping Information

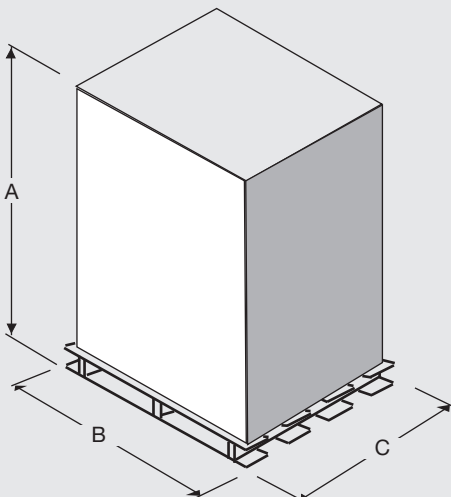

UNIT			FLUSH COVER			T-COVER		
Dim.	Description	Value	Dim.	Description	Value	Dim.	Description	Value
A	Height	50"	A	Height	47"	A	Height	53"
B	Length	40"	B	Length	40"	B	Length	40"
C	Width	48"	C	Width	48"	C	Width	48"

Units: 32 per pallet
Weight: 360 lbs. per pallet

Units: 150 per pallet
Weight: 640 lbs. per pallet

Units: 150 per pallet
Weight: 640 lbs. per pallet

BODY		
Dim.	Description	Value
A	Height	48"
B	Length	40"
C	Width	48"

Units: 32 per pallet
Weight: 230 lbs. per pallet

All information contained in this brochure was current at the time of printing. Because of Oldcastle Precast's policy of ongoing research and development, the Company reserves the right to discontinue or update product information without notice.