

B.L. WALLACE-DISTRIBUTOR, INC.


8542 La Salle St., Cypress, CA 90630 Phone (714)761-2071 FAX (714)761-0460
www.blwallace.com



SPECIFIED AND PREFERRED WORLDWIDE


L Series 910

Light Duty

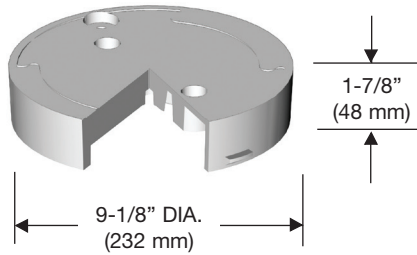

Flush Cover

Material: HDPE
Weight: 1.5 lbs.
Model: 910-3 No Bolt
910-3B Bolt Down

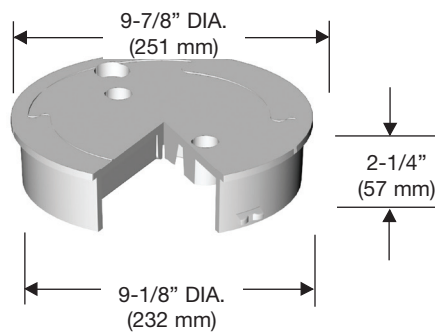


T-Cover

Material: HDPE
Weight: 1.5 lbs.
Model: 910-4 No Bolt
910-4B Bolt Down



Loc-Kit™
(Patent Pending)

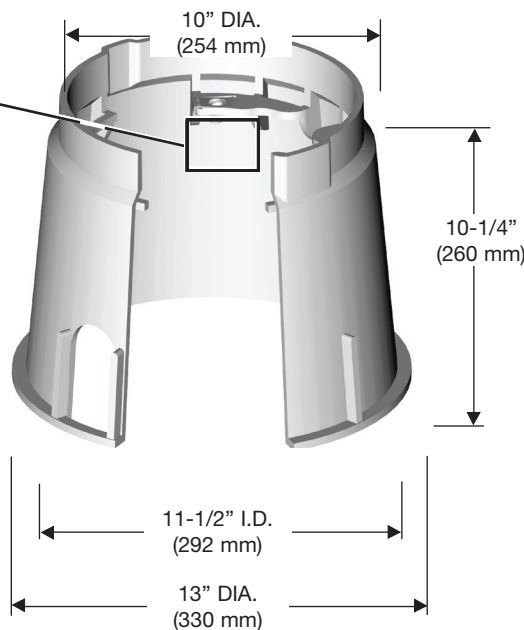

Body

Material: HDPE
Weight: 3.0 lbs.
Model: 910-10

Colors Available

Green, Grey, Black, Tan or Violet

Note: For use in non-vehicular traffic situations only. We do not recommend installation in concrete or asphalt. Weights and dimensions may vary slightly.

L Series 910

Light Duty


Static Vertical Load Rating (Design Load; Test Load)

- ASTM C857 – A-0.3, 300 lbf/ft²;
Report Ultimate
- SCTE – Light Duty, Pedestrian;
3,000 lbf

Shipping Configuration

- Unit, 99 assemblies,
= 42.25 cu. ft., 395.0 lbs.

Note: For use in non-vehicular traffic situations only. We do not recommend installation in concrete or asphalt. Weights and dimensions may vary slightly.



B.L. WALLACE-DISTRIBUTOR, INC.

Cypress, CA

Phone: (714)761-2071


FAX: (714)761-0460

Website: www.blwallace.com

Material Property	ASTM Test Method	Typical Value ¹
Type, Class, Category	D 1248	III, A, 3
Density, g/cm ³	D 1505	0.950 min., not to exceed 0.965
Tensile Strength, at break, psi	D 638	3,000 to 4,400
Elongation, at break, %	D 638	400
Tensile Impact, ft-lb/in ²	D 1822	27
Flexural Modulus, psi	D 790	120,000 min., not to exceed 240,000
Low Temperature Brittleness, F50, at °C	D 746	<-76
Hardness, Shore D	D 2240	66
Deflection Temperature, at 66 psi, °F	D 648	150 ⁰ min., not to exceed 200 ⁰
Electrical Dielectric Strength, V/mil	D 149	400 min., not to exceed 600
Molded Product²		
Chemical Resistance	D 543	Very Resistant
Water Absorption	D 570	Less than 1% weight change

¹The values listed for physical property measurements are nominal values only. Certain physical property measurements are subject to variations consistent with the test methods and are within a generally accepted range for such values.
²Test reports available on request.

Shipping Information

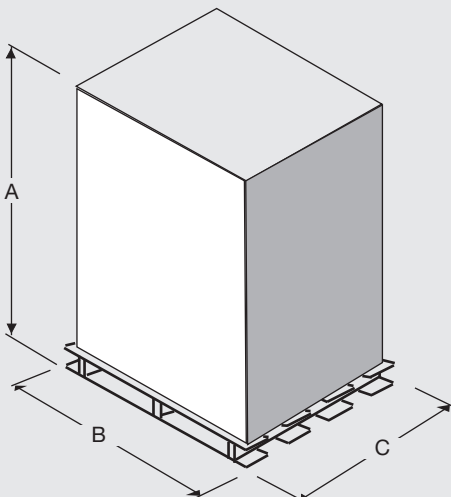

Dim.	Description	Value
A	Height	49"
B	Length	45"
C	Width	38"

Units: 99 per pallet
Weight: 486 lbs. per pallet